

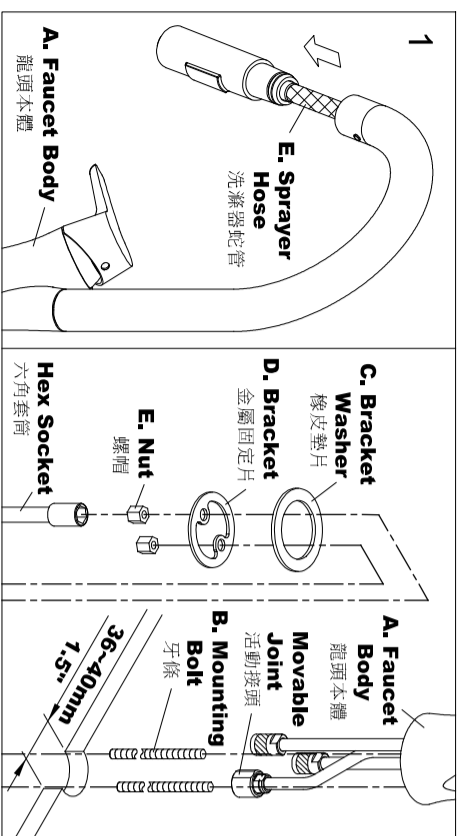


INSTALLATION INSTRUCTIONS



Kitchen Faucet W/ Sprayer 抽拉式龍頭 (附噴槍) 安裝說明

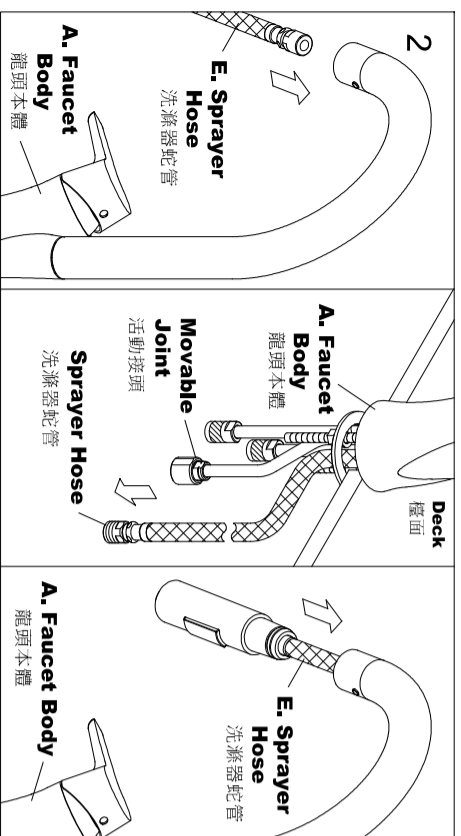


CAUTION : Prevent The Risk Of Product Damage.
注意：為增加產品使用壽命，請依說明清潔供水管路。
a. Turn on the angle stops (water suppliers) and run for 1 minute before connecting supply hose (flexible hose) to faucet body, or b.
安裝編織管之前，先把供水開關全開排水一分鐘。或 b/
安裝編織管之前，先把供水開關全開排水一分鐘，然後把供水開關關閉，把起泡器移開，把熱水及冷水全部轉開一分鐘，然後把水關掉再把起泡器裝回去。

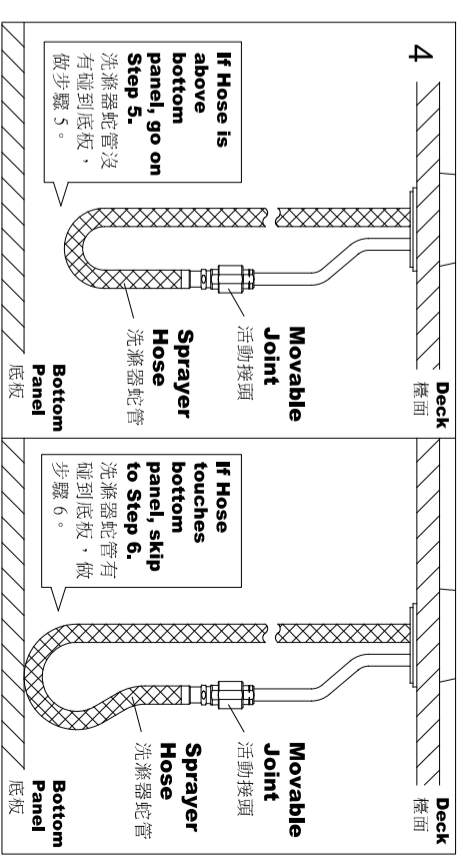

- For installation request, **Sprayer Hose** could be pulled out from **Faucet Body**. Screw the **Mounting Bolts** into the **Faucet Body** first. Set the **Bracket Washer**, **Bracket**, and **Nut** in order after passing the **Mounting Bolts** and cooper tubes through the deck hole. After confirming the position and direction of **Faucet**, tighten the **Nut** with a **Hex Socket** to fix the **Faucet**.
依安裝需求可將洗滌器蛇管抽出龍頭本體，再將牙條鎖入龍頭本體穿過洗臉盆 (檯) 洞口後，依序套入橡皮墊片、金屬固定片和螺帽，確認方向位置後，利用六角套筒調整螺帽固定龍頭。
- Insert the **Sprayer Hose** to the Spout of **Faucet** until **Sprayer** fix on the buckle of Spout.
將洗滌器蛇管穿過龍頭本體出水管直到洗滌器端卡入出水管扣件。
- Insert the **Gasket** into the **Movable Joint**, and then tighten the joint to connect the **Sprayer Hose**. Connect the **Braided Hoses** to water inlets of **Faucet Body** with the same color, and then screw the **Braided Hoses** to the cold and hot **Angle Stops**.
將墊片套入活動接頭，再將洗滌器蛇管與活動接頭鎖緊，分別將不鏽鋼軟管依顏色區分，將其安裝至顏色相對應的銅管上，再將冷熱進水的的不同鋼軟管鎖固於冷熱水供水開關。
- Check if the **Sprayer Hose** touches the **Bottom Panel**. If not, go on to Step 5. If yes, skip to Step 6.
確認拉直後的洗滌器蛇管是否碰到底板，如沒有碰到底板，作步驟5，如有碰到底板，作步驟6。

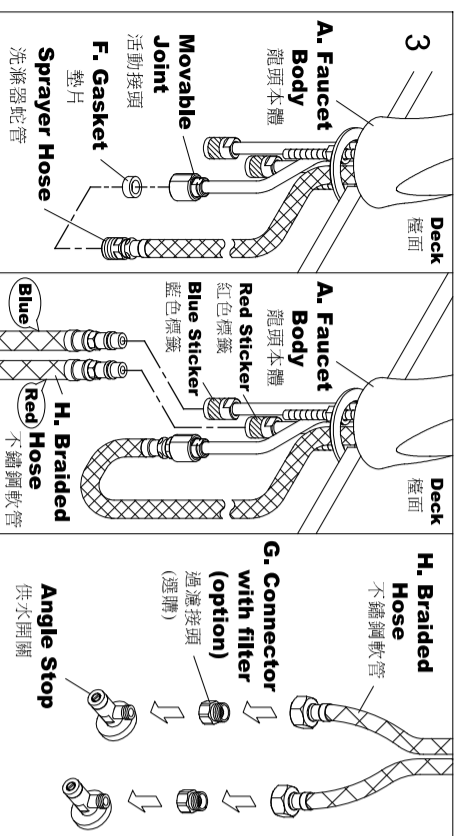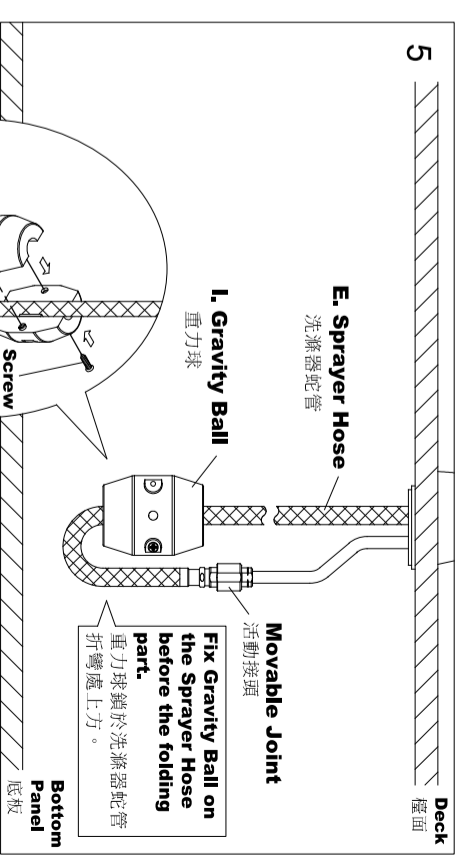

- Disassemble the **Gravity Ball** with a **Phillips Screwdriver** as shown, and then fix the **Gravity Ball** on the **Sprayer Hose** at 200mm (8") from the **Bottom Panel**.
如圖將重力球以十字螺絲起子拆解後鎖於洗滌器蛇管上，距離底板200mm(8")處。
 - Make sure all the fixing joints are locked properly, and the installation is completed.
測試水龍頭各接點鎖固處正常即完成安裝。
- Note:** It is recommended that the distance between the deck top and the bottom panel be greater than 560mm, so as to facilitate the drawing length of **Sprayer Hose** to reach the maximum length. If it is less than 560mm, the drawing length will be shortened.
注意：建議檯面與底板距離大於560mm，以利洗滌器蛇管抽拉長度達最大值，如不夠560mm會使抽拉長度縮短。

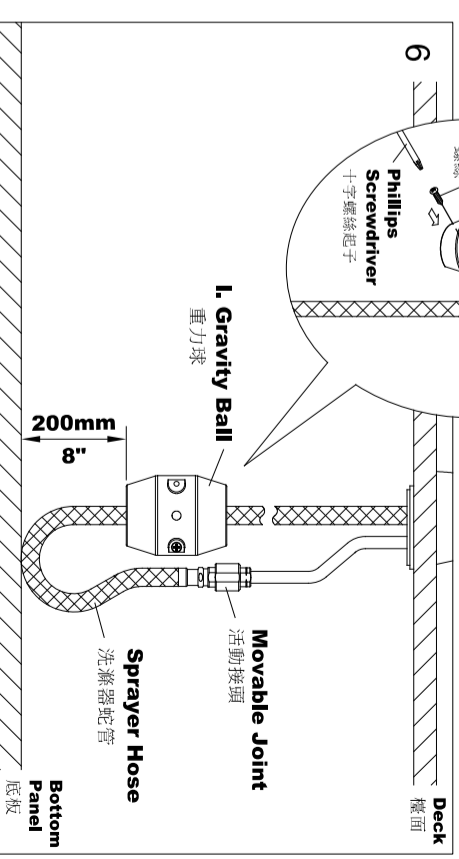

FIXING CONTENTS

組配件內容

A. Faucet Body * 1 龍頭本體	B. Mounting Bolt * 2 牙條	C. Bracket Washer * 1 橡皮墊片	D. Bracket * 1 金屬固定片	E. Nut * 2 螺帽	F. Gasket * 1 墊片	G. Connector with filter (option) 過濾接頭 (選購)	H. Braided Hose * 2 不鏽鋼軟管	I. Gravity Ball * 1 重力球
-----------------------------------	-----------------------------------	--------------------------------------	--------------------------------	-------------------------	----------------------------	---	-------------------------------------	-----------------------------------