
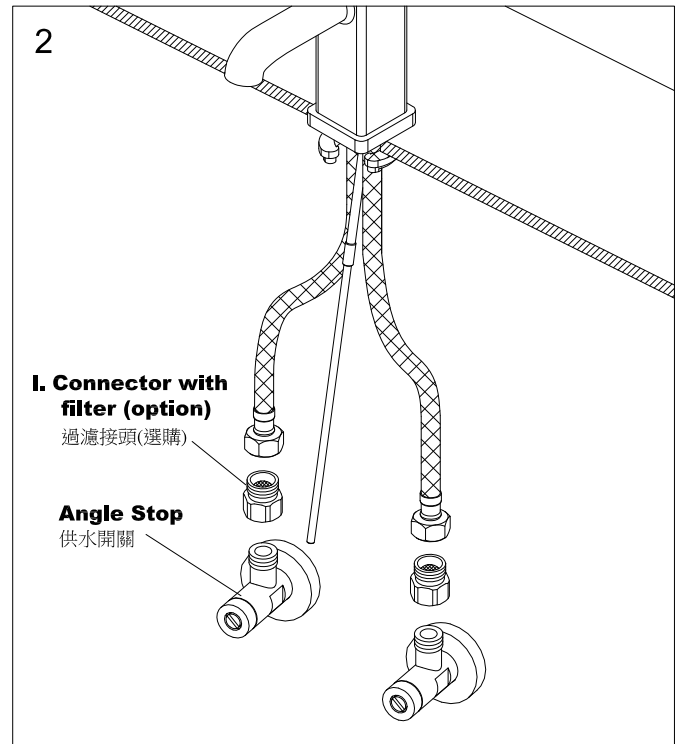


# INSTALLATION INSTRUCTIONS

## BASIN FAUCET

### 面盆龍頭安裝說明

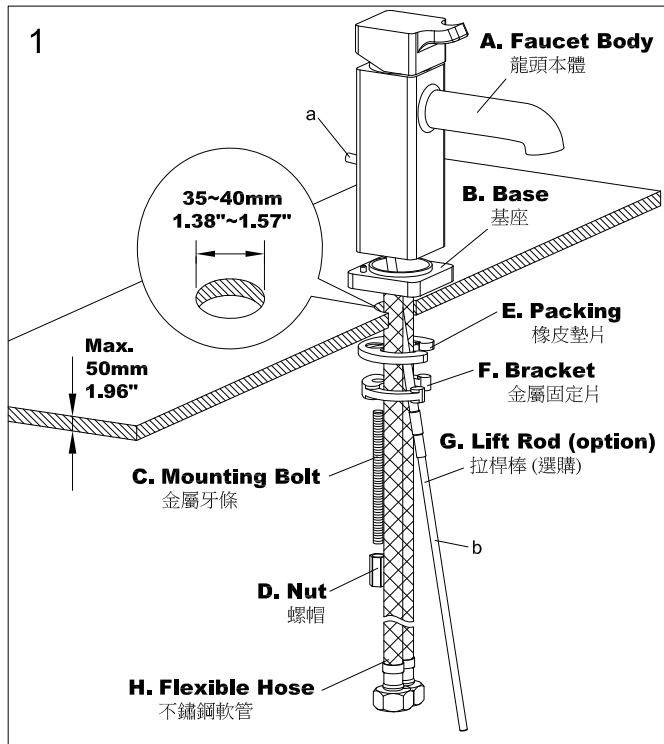

1. The diameter of the installing hole should be 35~40mm.(1.38"~1.57") (Please note the maximum available thick of deck is 50mm.)(Fig.1)

檯面鑽一直徑35~40mm的圓孔，檯面厚度需小於50mm(圖1)

2. Combine **Faucet Body** and **Base** first, screw **Flexible Hoses** and **Mounting Bolt** into the bottom of **Faucet Body**, and then assemble **Lift Rod** (option) in **Faucet Body**. Place **Bracket with Packing** and **Nut** onto **Mounting Bolt**, position faucet on fixture, and then tighten **Nut** securely. (Fig.1)

將基座與本體相結合，再將不鏽鋼軟管和金屬牙條固定於龍頭本體下方，並將拉桿棒(選購)安裝至龍頭本體。從金屬牙條下方依序套入橡皮墊片、金屬固定片和螺帽，確認方向後鎖緊螺帽(圖1)

3. Install **Connector with filter** onto the outlet of **Angle Stop** first, and then connect **Flexible Hoses** to **Connectors** to finish the complete installation. (Fig.2)

先連接過濾接頭(選購)到進水開關，再將不鏽鋼軟管連接到過濾接頭，確認完成安裝程序(圖2)

## FIXING CONTENTS

### 組配件內容

