


# INSTALLATION INSTRUCTIONS

## DOOR HANDLES

### 雙邊玻璃門把安裝說明

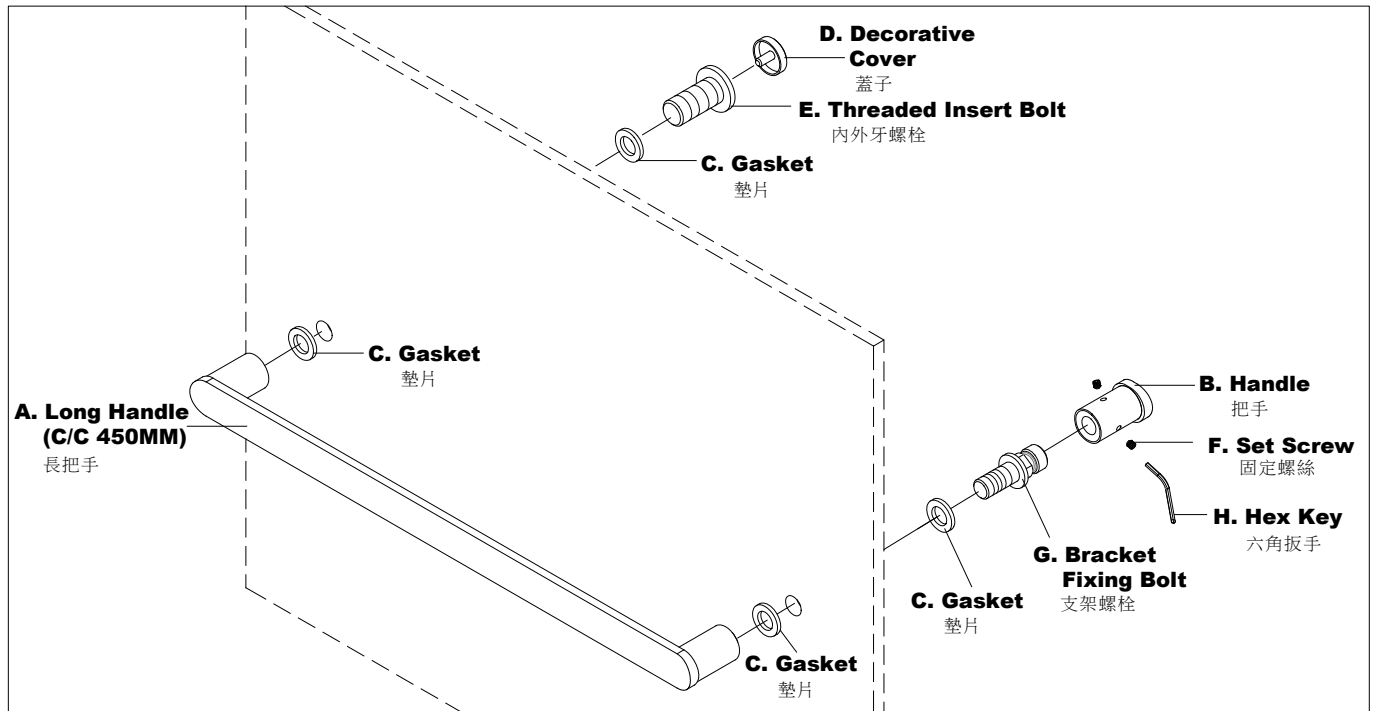

⚠ NOTICE 1. Available size of mounting holes is O/D15mm; available thickness of glass door is 8~20mm.  
注意 1. 玻璃門適用鑽孔孔徑 15mm; 厚度 8~20mm

NOTICE 2. Place all the **Gaskets** between glass door and metal parts.  
注意 2. 請注意將所有墊片分別置於玻璃門與金屬件的中間。

1. Disassemble the parts as figure shows.  
將整組零件拆開。
2. Fix **Long Handle** with **Threaded Insert Bolt** and **Bracket Fixing Bolt** from the other side securely, and then screw **Decorative Cover** on the **Threaded Insert Bolt**.  
將長把手以內外牙螺栓及支架螺栓從另一面鎖緊，然後將裝飾蓋鎖入內外牙螺栓。
3. Fix **Handle** to **Bracket Fixing Bolt** with **Set Screws**, and then tighten the **Set Screws** with **Hex Key**.  
將把手對準支架螺栓，並以六角扳手將埋頭螺絲鎖緊，使把手固定於支架螺栓上。

## FIXING CONTENTS

### 組配件內容

